


产品技术规格书 (Product Technical Specification)

No.	名称 (Name)	规格 (Specification)	No.	名称 (Name)	规格 (Specification)		
1	型号 (Model)	OBJ1623ML12M	14	视场角 F.O.V.(DxVxH)	1.1" D	2/3 H	1/2 V
2	物料代码 (Material Code)	3. A01. 010010-A			54.39	35.67	26.32
3	靶面格式 (Image Format)	1.1"			44.56	28.85	21.18
4	分辨率 (Resolution)	150lp/mm			34.45	21.83	15.96
5	焦距 (Focal Length)	16mm	15	接口 (Mount)	C		
6	后截距 (Back Focus)	12.42mm	16	适用物距 (Suitable Distance)	0.1~∞m		
7	F值 (F/ No.)	2.3	17	最佳物距 (Optimum Working Distance)			
8	光圈 (Iris Type)	M-Iris	18	镀膜 (Coating)	400-900nm		
9	畸变 (Distortion)	<0.4%	19	外形尺寸 (Dimension)	φ46×69.03mm		
10	通光口径 (Lens Effective Diameter)	前面 (Front)	φ28.1mm	20	重量 (Weight)	g	
		后面 (Back)	φ14.25mm	21	工作温度 (Operating Temperature)	-20~+65°C	
11	相对照度 (Relative Illuminate)	47.6%	22	镜头组成 (Lens Construction)	12-9		
12	光学总长 (TTL)	82.3-83.6mm	23	最大主光线入射角 (CRA)	13.98°		
13	设计波长 (Design Wavelength)	400-700nm	24	滤镜尺寸 (Filter Thread)	M43×0.75		

Size:

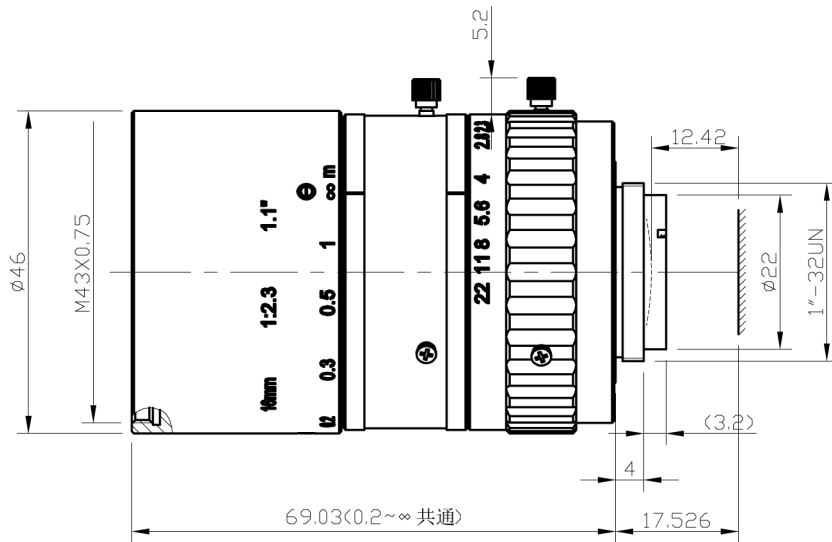

Draw	Check	Recheck	Approval